

Durable Ribbed Matting Datasheet


Product Code: RC04165

Product Description

We design our durable ribbed matting in order to ensure that it can provide consistent performance without warping or deterioration. This enables you to use it in highly demanding applications and environments with ease. Each rib features a textured finish that enables our flooring to provide good levels of grip in both wet and dry environments.

Size Specifications

Stock Sizes	Thickness	Weight (Kg/m ²)
20m x 1m	2.8mm	2.45

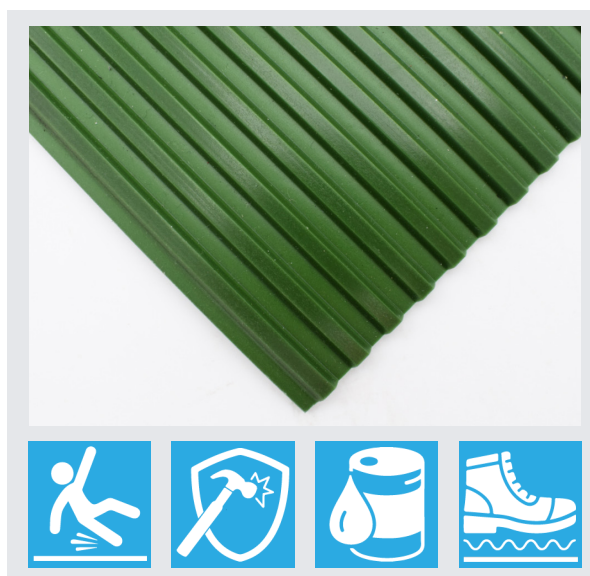

Technical Specification

Properties	Values
Product	Durable Ribbed PVC Matting
Composition	Flexible Polyvinyl Chloride (PVC)
Chemical Resistance	Resistant to most acids, alkalis and oils
Fire Resistance	EN 13501-1: 2007-Bfl-S1
Temperature Range	-23°C to +60°C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%
Environment	100% recyclable

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

The smart way to buy rubber & plastics

Matting Colour Options



Green



Dark Grey

Other colours available as a special order, subject to minimum order quantities

Matting Installation

As we supply our Durable Ribbed PVC matting in a single roll, installation is quick and simple.

- Loose lay, no permanent fixtures required
- Supplied in 2m rolls, simply cut to size
- Holes can be cut to accommodate objects
- Contours to the floor surface

Cleaning & Maintenance

Keeping our Durable Ribbed PVC matting clean is a quick and easy job.

- Light weight & easy to handle
- Simply lift or roll matting to clean
- Easy to wipe & vacuum clean

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.