

Studded Anti-Slip PVC Matting Datasheet

Product Code: RC04168

Product Description

Our PVC studded anti-slip matting provides excellent gripping properties in both wet and dry applications. It is easy identifiable due to the unique "dot" or "coin" pattern on the top surface of the mats. Aside from using this product as matting you can also install it onto any surface to create a safe, anti slip working surface.

Size Specifications - Standard


Stock Sizes	Thickness	Weight (Kg/m ²)
25m x 0.98m	1.6mm	2.35

Size Specifications - Extra

Stock Sizes	Thickness	Weight (Kg/m ²)
20m x 0.98m	2.5mm	3.75

Technical Specification


Properties	Data
Product	Anti-Slip Roof Matting
Composition	Flexible Polyvinyl Chloride (PVC)
Chemical Resistance	Resistant to most acids, alkalis and oils
Fire Resistance	EN ISO 13501 - 1 : 2007 - Cfl - S1
Temperature Range	-23°C to +60°C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%

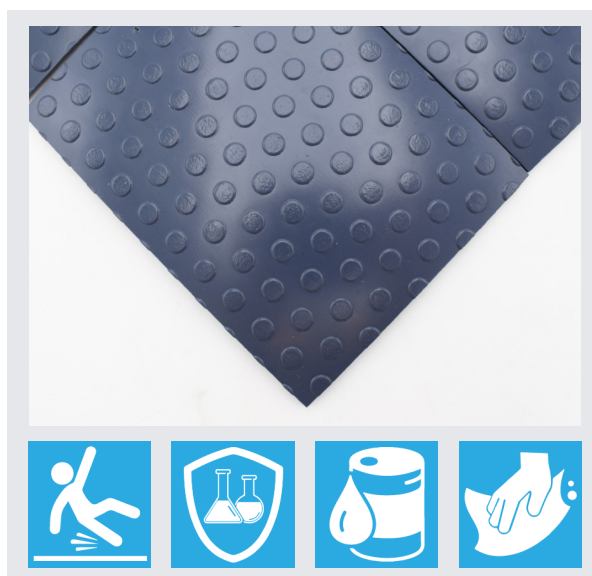**ISO
9001 : 2015
REGISTERED**

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

The smart way to buy rubber & plastics

Matting Colour Options

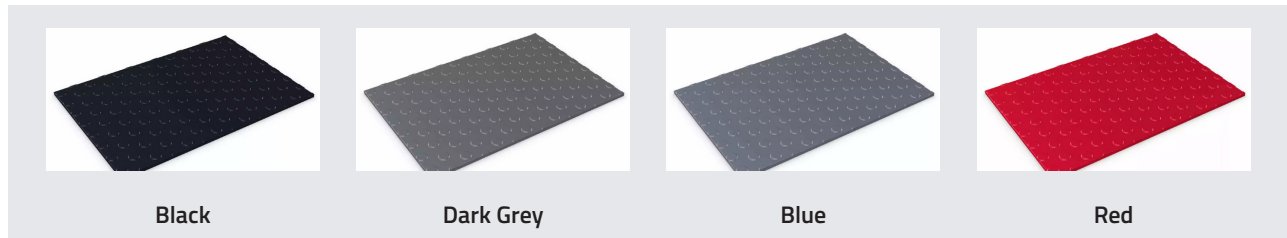

Other colours available as a special order, subject to minimum order quantities

Matting Installation

We supply our Studded Anti-Slip PVC matting in a single roll for quick and easy installation.

- Loose lay, no permanent fixtures required
- Supplied in 25/20m rolls, simply cut to size
- Holes can be cut to accommodate objects
- Contours to the floor surface

Cleaning & Maintenance

Keeping our Studded Anti-Slip PVC matting clean is a quick and easy job.

- Simply lift or roll matting to clean
- Easy to clean with a vacuum or mop
- No special cleaning tools required

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.