

RoofGrip PVC Roof Walkway Matting Datasheet


Product Code: RC04126

Key Features

- Excellent grip in all weather conditions
- Wind resistant
- Self draining
- Protects roof membranes from damage
- Easy to install
- Minimal maintenance required

Size Specifications

Stock Sizes	Thickness	Weight (Kg/m ²)
10m x 0.6m	14mm	6.5
10m x 0.91m	14mm	6.5
10m x 1.22m	14mm	6.5

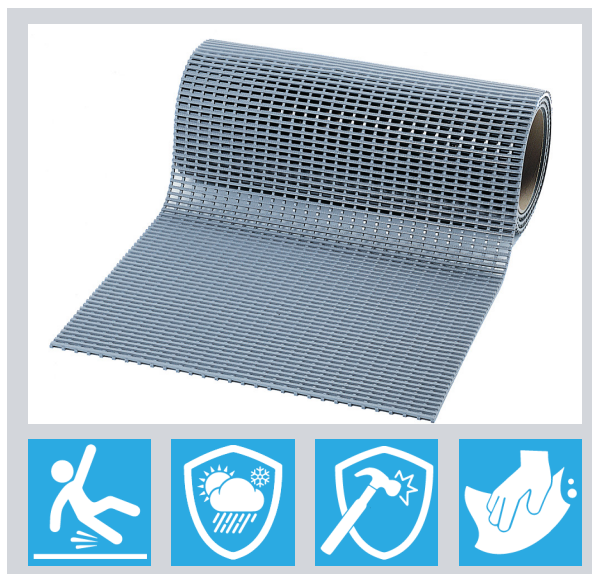

**ISO
9001 : 2015
REGISTERED**

Technical Specification

Properties	Data
Product	Anti-Slip Roof Matting
Composition	Flexible Polyvinyl Chloride (PVC)
Acoustic Insulation	Excellent sound absorption properties
Chemical Resistance	Resistant to most acids, alkalis and oils
Fire Resistance	EN ISO 13501 - 1 : 2007 - Cfl - S1
Slip Resistance	ASTM F 1677 - Dry/Wet: 1.0/0.9 DIN 51130: R10, V10
Temperature Range	-23°C to +60°C
UV Resistance	Resistant to PVC degradation
Wind Resistance	When loose laid, RoofGrip PVC can withstand winds up to 60mph (96 km/h)
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%
Hygiene	Naturally resistant to bacteria growth

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.