

Grit Top Matting Datasheet

Product Code: RC04156


Product Description

RubbaGrit[®] is our highly durable grit top matting. The mats feature a mineral coated "grit top" finish to provide outstanding anti-slip properties in both wet and dry environments. The rubber base makes the matting oil resistant and suitable for use in heavy industrial areas prone to oil spillage.

Size Specifications

Stock Sizes

3mm x 1.2m x 10m

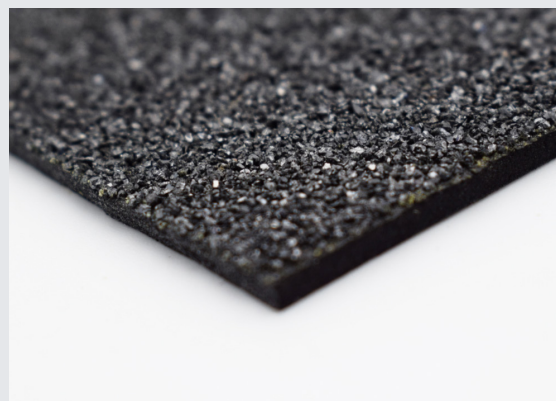

ISO
9001 : 2015
REGISTERED

Technical Specification

Properties	Test Method	Data
Compound	-	NBR
Hardness (Shore A)	ASTM D2240	60° +/- 5°
Density (Specific Gravity)	ASTM D 1298	1.3 +/- 0.05
Tensile Strength	ASTM D412	5 Mpa +/- 1 Mpa
Elongation at Break	ASTM D412	300% +/- 50%
Tear Strength	ASTM D 624	35 N/mm +/- 5 N/mm
Heat Resistance (70hrs @ 70°C)	ASTM D 573	No visual damage

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.