


EPDM Sponge Profile Dual Hardness Door Seal

Product Code: RC-S126

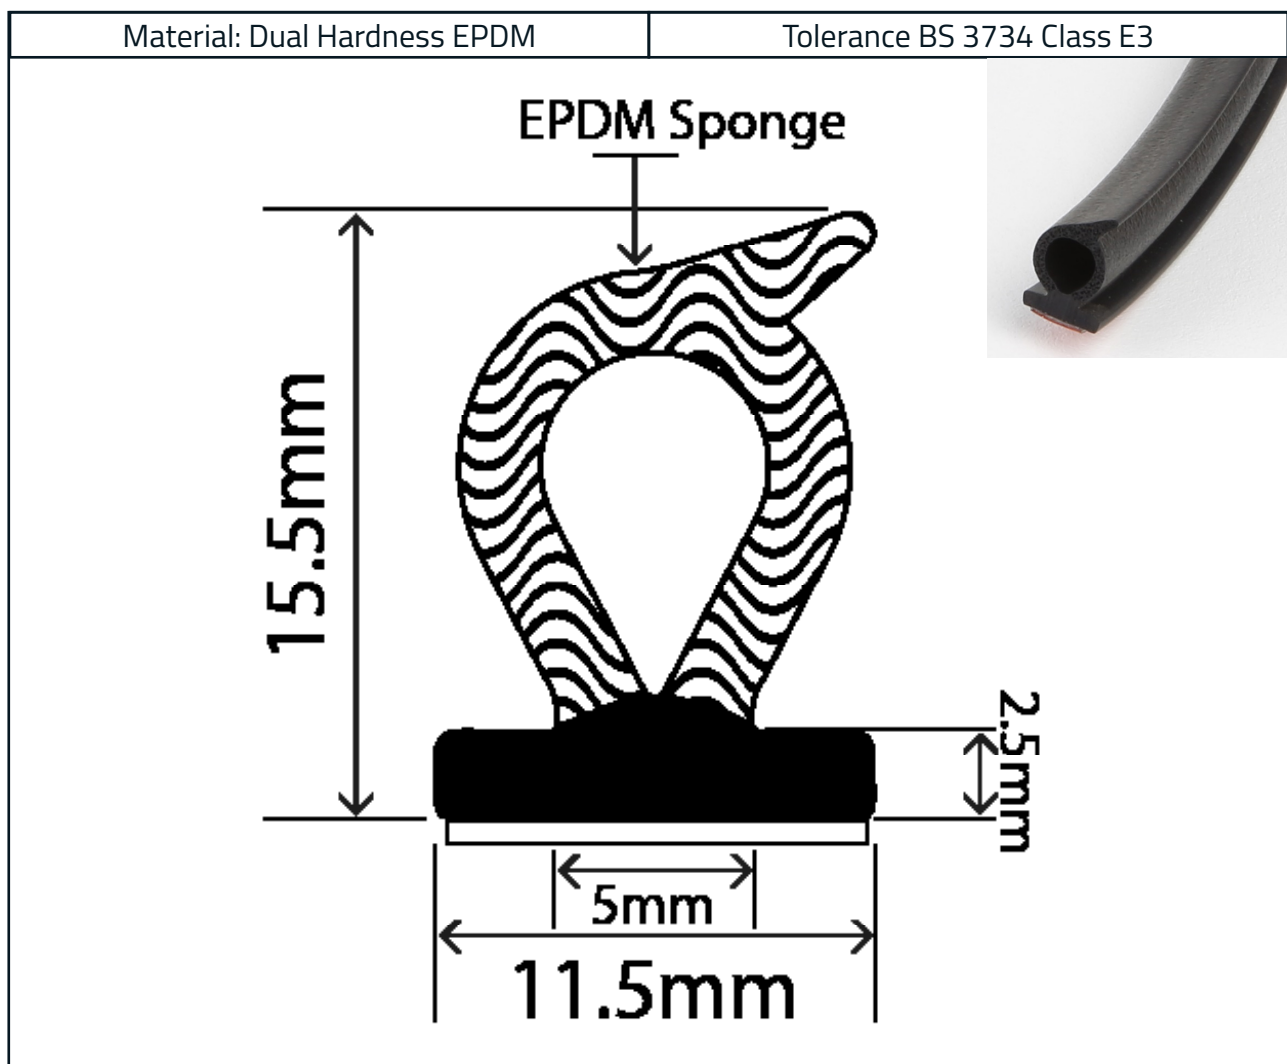

Details:

Adhesive Backed

1. Sold by either the coil or the metre
2. This product's coil length is 30 metres
3. This product's weight per metre is 0.09 kg
4. This product is made of a flexible sponge material therefore sizes are approximations.

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Specification

Specification	Value
Material	EPDM
Hardness (IRHD)	65-75
Tensile Strength (MPA)	10
Elongation @ Break (%)	500
Tear Strength (kN/m)	50
Compression Set (22 hours, 70°C (%))	21
Ozone Resistance (72 hours, 40°C, 22PPHM, EXT)	No Cracks
Age 70 hours at 70°C - Hardness Change (IRHD)	0
Tensile Change (%)	+9
Elongation at break	0
Material	EPDM Sponge
Density Range	0.5 - 0.9 gm/cm ³
Oven Ageing (7 days, 70°C)	±30%
Water Absorption	5% Maximum
Compression (24 hours recovery)	25% Maximum
Ozone Resistance	Excellent
Weather Resistance	Excellent
Low Temperature Flexibility (-40°C)	Pass
UV Light Resistance	Excellent
Mould Growth Resistance	Very Good



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.