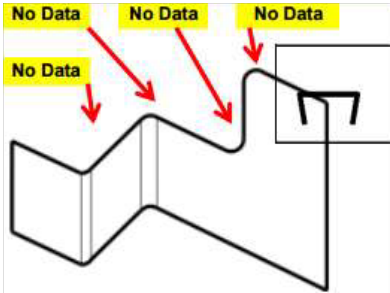


## 'U' Channel Datasheet

Product Code: RC2068

**Manufacturing Tolerances: ISO 3302-1/1996 Quality Level 2****Description: Edge Protector**

| Photo                                                                              | Drawing                                                                            | Bending Radius                                                                       |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |

### Characteristics

|                                 |                |
|---------------------------------|----------------|
| First Material:                 | TPE            |
| First Material Hardness:        | 60 Shore A     |
| Colour:                         | Black          |
| Second Material:                | -              |
| Second Material Hardness:       | -              |
| Weight Gr/Meter:                | 104 Gr         |
| See Data Sheet Adhesives:       | -              |
| Use Temperature°:               | -25°C to +70°C |
| Edge thickness/ Clamping range: | 20mm to 20mm   |
| Clearance to fill:              | -              |

### Mechanical Specifications:

|                                                           |   |   |
|-----------------------------------------------------------|---|---|
| Gripping Attachments at 20°C with<br>10cm edge thickness: | - | - |
|                                                           | - | - |
|                                                           | - | - |

### Recomendations:

Use grease remover before clipping to improve gripping attachment.  
Deburr to improve the mounting of the profile.

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.