

## RubbaGrit Non-Slip Rubber Matting Datasheet

Product Code: RC04156-NR


### Product Description

RubbaGrit<sup>®</sup> is our highly durable grit top matting. The mats feature a mineral coated "grit top" finish to provide outstanding anti-slip properties in both wet and dry environments. This matting conforms to slip resistance test - DIN 51130 Category R11.

### Size Specifications

#### Stock Sizes

3mm x 1.2m x 10m

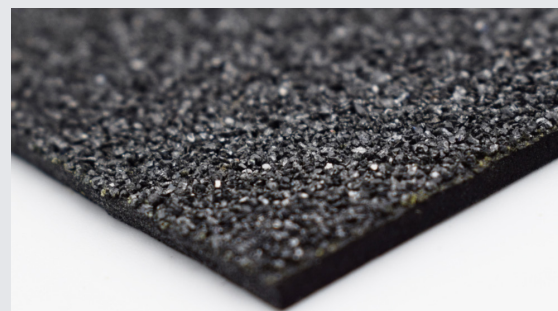

ISO  
9001 : 2015  
REGISTERED

### Technical Specification

Properties	Test Method	Data
Compound	-	NR/SBR
Hardness (Shore A)	ASTM D2240	60° +/- 5°
Density (Specific Gravity)	ASTM D 1298	1.3 +/- 0.05
Tensile Strength	ASTM D412	5 Mpa +/- 1 Mpa
Elongation at Break	ASTM D412	300% +/- 50%
Tear Strength	ASTM D 624	35 N/mm +/- 5 N/mm
Heat Resistance (70hrs @ 70°C)	ASTM D 573	No visual damage

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.