


RUBBAHATCH[®] 35MM X 20MM COMPOSITE DOOR & HATCH PACKING

Product Code: RUBBAHATCH-35-20

ISO
9001 : 2015
REGISTERED

Outer Skin Material: Natural Rubber / SBR

Core Material: Cellular Natural Rubber

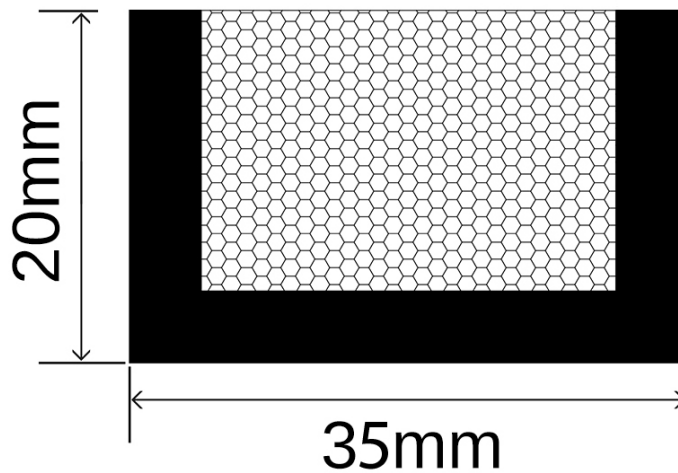

Measurements:

Height	Width	Standard Coil Length
20mm	35mm	10m

Outer Skin Material Specification

Property	Value
Polymer	Natural Rubber / SBR
Shore Hardness (Shore A)	60° - 70°
Tensile Strength	4.0MPa
Elongation at Break	200%
Density	1.3kg/cm ³
Compression Set (20% Deflection at 70 °C)	15% (Maximum)
Manufacturing Tolerances	BS 3734 Class E2
Operating Temperature Range	-20 °C to +120 °C

Core Material Specification

Property	Value
Polymer	Open Cell Natural Rubber
Shore Hardness (Shore A)	10° - 18°
Tensile Strength	295kPa
Elongation at Break	235% - 250%
Density	420kg/cm ³
Compression Set (20% Deflection at 70 °C)	15% (Maximum)
Accelerated Ageing (Change in Compression Deflection at 70 °C)	±20%
Operating Temperature Range	-20 °C to +120 °C

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.