


Self-Grip Top Seal (FR to EN 45542-2) - 11mm x 21.5mm

Product Code: RCK-0006-FR

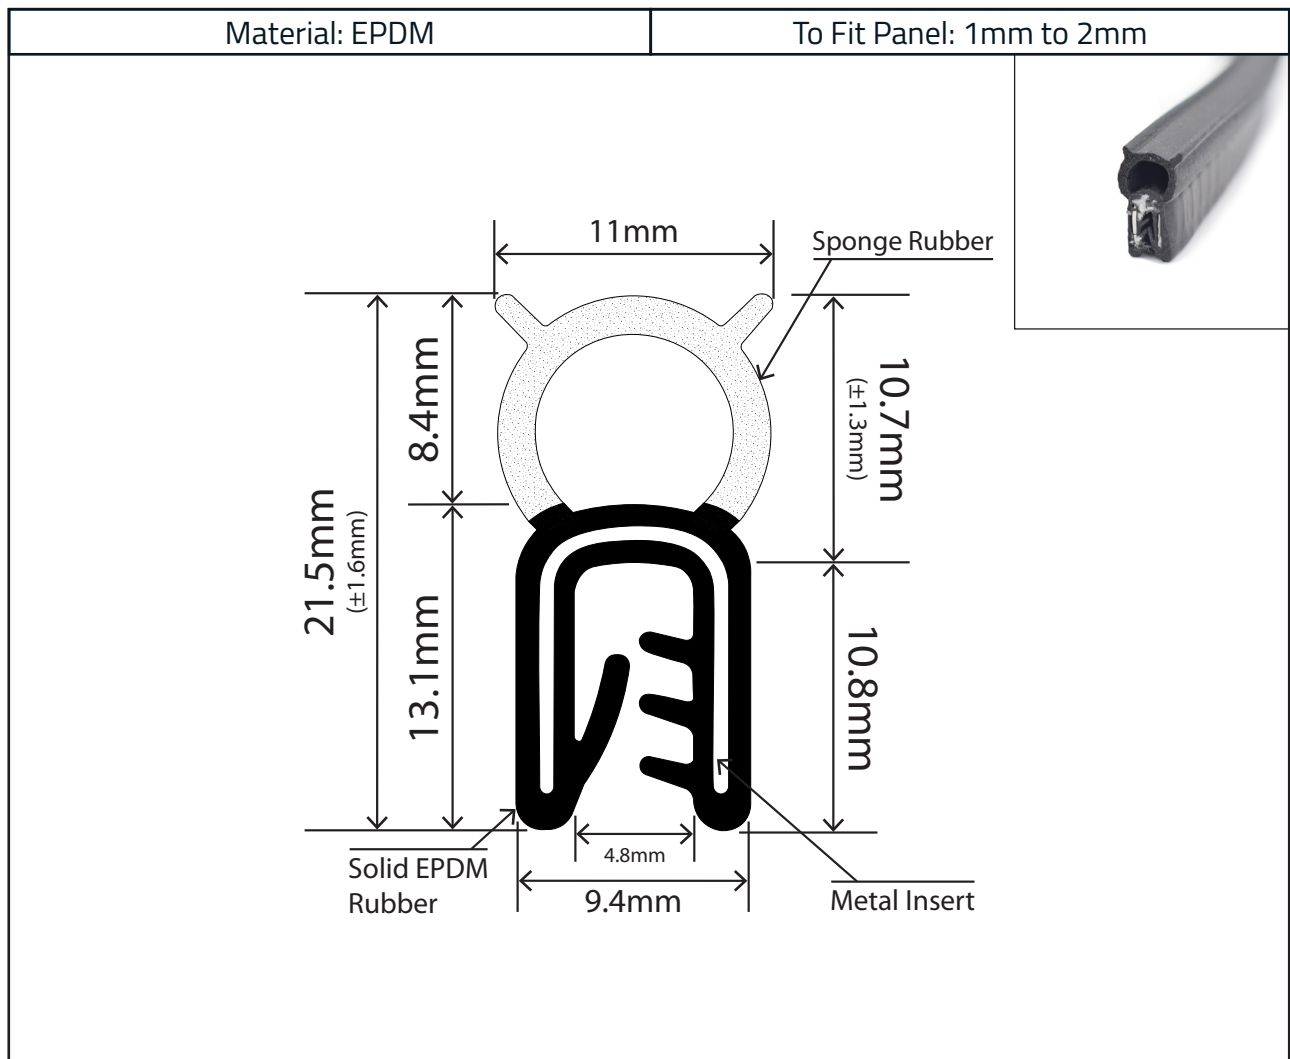

Measurements:

Height	Width
21.5mm	11mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data - EPDM

Property	Test Method	Value
Compound	-	EPDM
Colour	-	Black
Hardness (Shore A)	TS ISO 7619-1	70° ±5°
Tensile Strength	TS ISO 37	≥7.5MPa
Elongation at Break	TS ISO 37	≥300%
Tear Resistance	TS 4698 ISO 34-1	≥8N/mm
Compression Set (22 hours @ 100°C)	TS 4595 ISO 815	34%
Ozone Resistance (72 hours @ 40°C - 50pphm)	TS 2680 (ISO 1431-1 A)	NO CRACK
UV Resistance (anti-yellowing)	ASTM D 1148	NO MIGRATION
Brittleness Point (24 hours @ -40°C)	TS 3047-ISO812	NO CRACK
Flame Resistance	EN 45545-2	NON FLAMMABLE
Working Temperature Range	-	-40°C to +120°C

Technical Data - EPDM Sponge Rubber

Property	Test Method	Value
Compound	-	Closed Cell EPDM Sponge
Colour	-	Black
Density	TS 2817 ISO 2781	0.6g/cm ³
Tensile Strength	TS ISO 37	2.8MPa
Elongation at Break	TS ISO 37	140%
Compression Deflection	ASTM D 1056	42kPa
Water Absorption	ASTM D 1056	0.98%
Ozone Resistant (72 hours @ 40°C - 50pphm)	ISO 1431-1 A	NO CRACKING
Thermal Conductivity Coefficient	ASTM C 518	0.15W/m.K
Working Temperature Range	-	-40°C to +70°C
Recovery After Ageing	-	82%

**ISO
9001 : 2015
REGISTERED**

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.