


Nitrile Solid Rubber Seal - 50mm x 55mm Datasheet

Product Code: CU-EX-1326-5

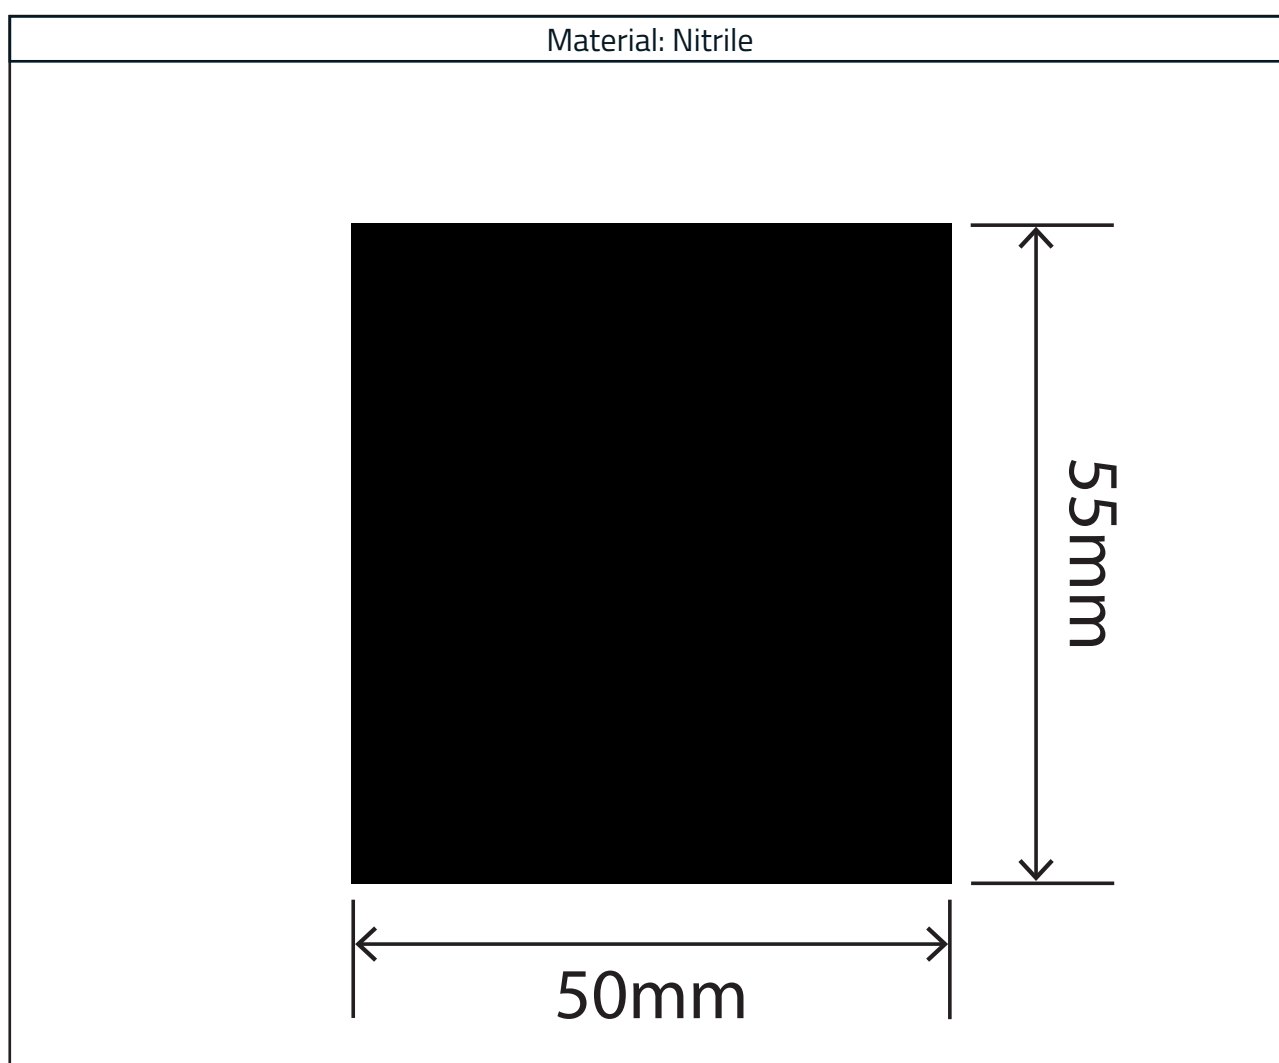

Measurements:

Height	Width
55mm	50mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Material Specification

Property	Test Method	Value
Compound	-	Nitrile Butadiene Rubber
Colour	-	Black
Hardness (Shore A)	ASTM D 2240	70° ±5°
Tensile Strength	ASTM D 412	6.15MPa
Elongation at Break	ASTM D 412	313%
Compression Set (24 hours at 70°C -%25)	TS 4595 ISO 815	34%
Ozone Resistance (72 hours at 40°C 50pphm)	TS 2680 (ISO 1431-1 A)	NO CRACK
UV Resistance	ASTM D 1148	NO MIGRATION/COLOUR CHANGE
Working Temperature Range	-	-20°C to +100°C



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.