

CushionGrid Drainage Matting Datasheet


Product Code: RC04143

Key Features

- Ideal for surf and wave simulators
- Provides extra-soft landing for surfers
- Self-draining
- Resistant to chemicals, acids, and oils
- Easy to install
- Contours to uneven surfaces
- Minimal maintenance required

Size Specifications

Stock Size	Thickness	Weight
10m x 0.91m	20mm	7.1kg/m ²
10m x 1m	20mm	7.1kg/m ²

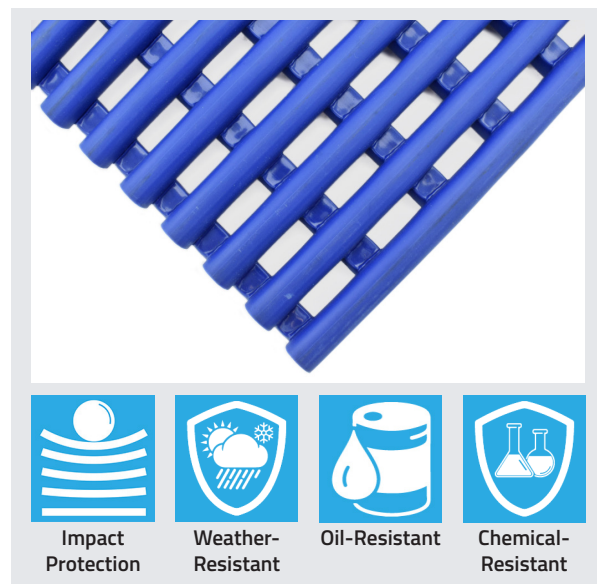

Technical Specification

Property	Value
Product	Cushioned drainage matting
Composition	Flexible polyvinyl chloride (PVC)
Acoustic Insulation	Excellent sound absorption properties
Chemical Resistance	Resistant to most acids, alkalines, and oils
Fire Resistance	EN ISO 13501 - 1 : 2007 - Cfl - S1
Temperature Range	-23°C to +60°C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%
Hygiene	Naturally resistant to bacteria growth
Environmental	100% recyclable



**ISO
9001 : 2015
REGISTERED**

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.