

## Fine Ribbed Electrical Matting Datasheet



Product Code: RC04153-CL2-BLK-10X370

### Key Features

- Safe working voltage of 17,000V
- Anti-slip finish
- Anti-fatigue to prevent stress on joints
- High-quality durable material
- Provides low level sound absorption
- Can also be used as standard workplace matting
- Easy to install

### Size Specifications

Length	Width	Thickness
10m	370mm (±3%)	4mm

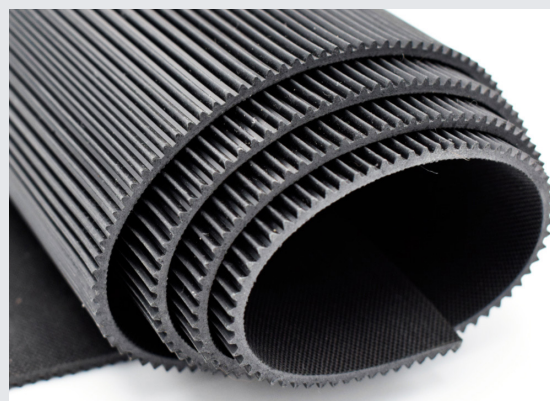

Low  
Maintenance



Anti-Slip



Flame  
Retardant



Oil-Resistant

### Technical Specification



ISO  
9001 : 2015  
REGISTERED



Property	Value
Product	Electrical Voltage Insulation Matting
Compound	Rubber Elastomer
Hardness (Shore A)	65° ±5°
Density	1.4g/cm <sup>2</sup>
Tensile Strength	70kg/cm <sup>2</sup>
Elongation	300%
Working Temperature Range	-40°C to +70°C
Mat Colour	Black
Maximum Tested Voltage	30,000V
Proof Voltage	20,000V
Safe Working Voltage	17,000V

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.