


Neoprene Round U Channel Profile - 6mm x 13.5mm

Product Code: RC-I0277

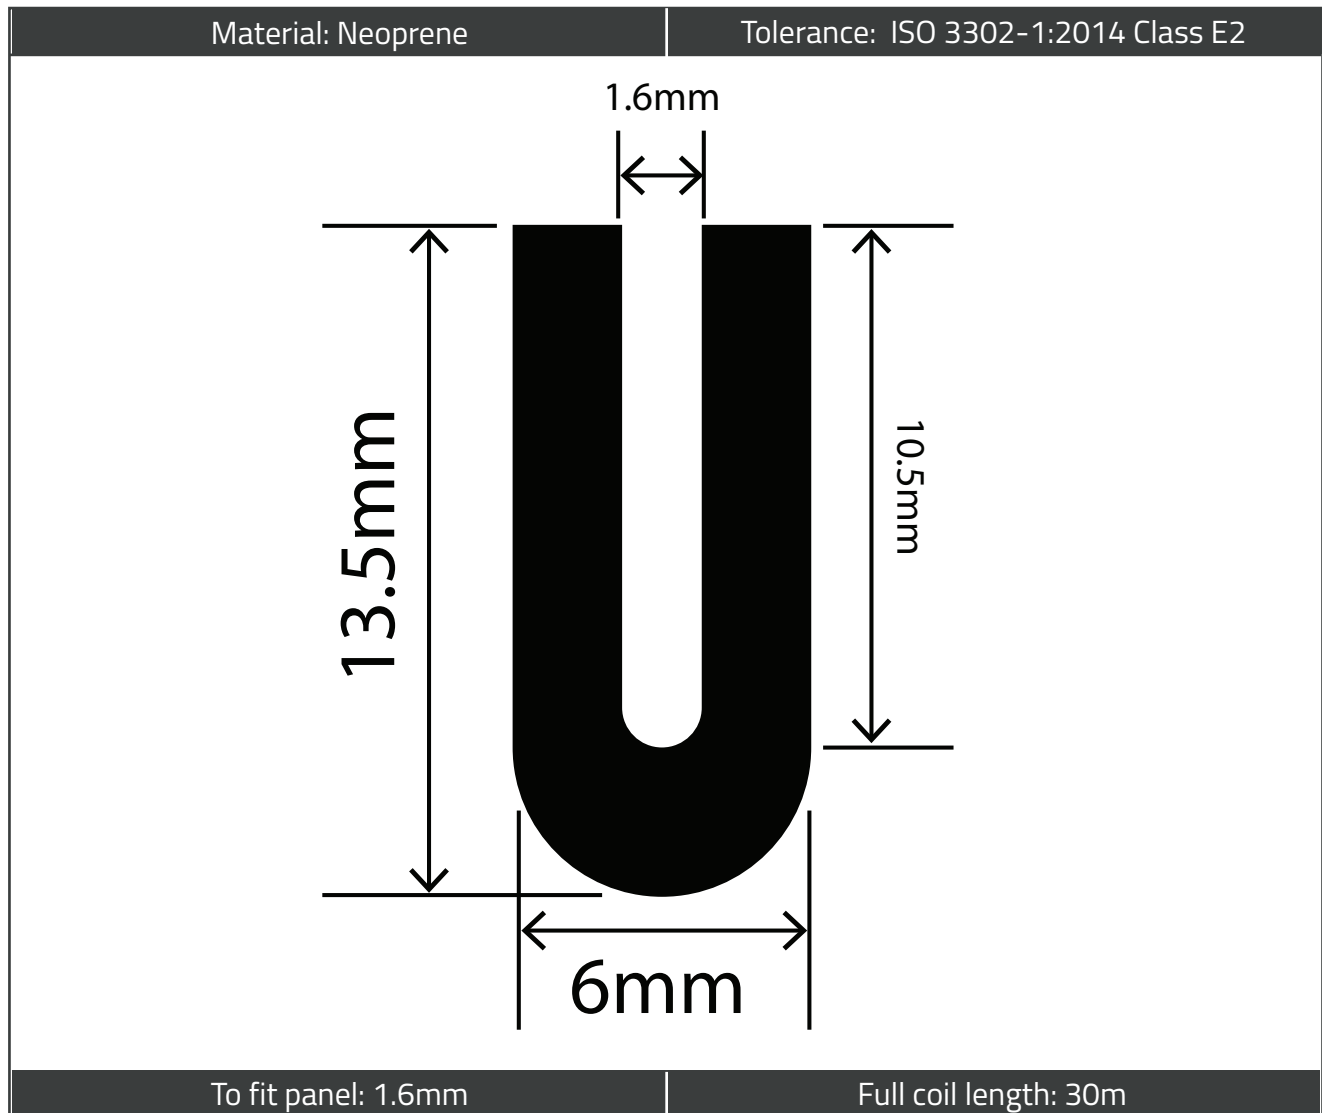

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk**W** www.rubbersmart.co.uk**T** +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80



The smart way to buy rubber & plastics

Technical Data

Property	Value
Compound	Neoprene (CR)
Colour	Black
Hardness (IRHD)	65° ± 5°
Density (Specific Gravity)	1.44 ± 0.02
Tensile Strength	> 10 MPa
Elongation at Break	225 %
Compression Set (22 h @ 70° C)	17.5 %
Working Temperature Range	-15° C to +90° C
Air Aged (70 h @ 70° C)	
Hardness Change (IRHD)	+ 3
Tensile Strength Change	± 5 %
Elongation at Break Change	± 5 %

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk

W www.rubbersmart.co.uk

T +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80

