


# Neoprene Solid Rubber Strip

Product Code: RC1101-CR

## Key Features

- Excellent resistance to weathering, UV, and ozone
- Provides watertight and airtight seal
- Moderate chemical and oil resistance
- Remains flexible under pressure

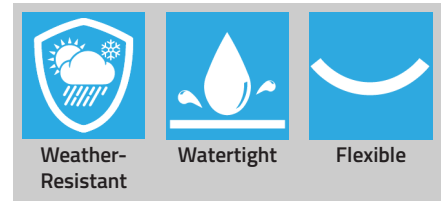

## Technical Data

| Property                       | Test Method        | Value                        |
|--------------------------------|--------------------|------------------------------|
| Compound                       | -                  | CR / SBR                     |
| Colour                         | -                  | Black                        |
| Hardness (Shore A)             | ASTM D2240         | 70° ±5                       |
| Density                        | ASTM D297          | 1.70 g/cm <sup>3</sup> ±0.05 |
| Tensile Strength               | ASTM D412          | 35 kg/cm <sup>2</sup>        |
| Elongation at Break            | ASTM D412          | 200 %                        |
| Tear Strength                  | ASTM D624          | 15 kg/cm                     |
| Compression Set (22 h @ 70° C) | ASTM D395 Method B | 50%                          |
| Working Temperature Range      | -                  | -30° C to +70° C             |

## Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E [info@rubbersmart.co.uk](mailto:info@rubbersmart.co.uk)W [www.rubbersmart.co.uk](http://www.rubbersmart.co.uk)

T +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales  
Company Number - 08350831 | VAT Number - GB 156 8355 80

