


TPE L Profile - 20mm x 20mm

Product Code: RC4352

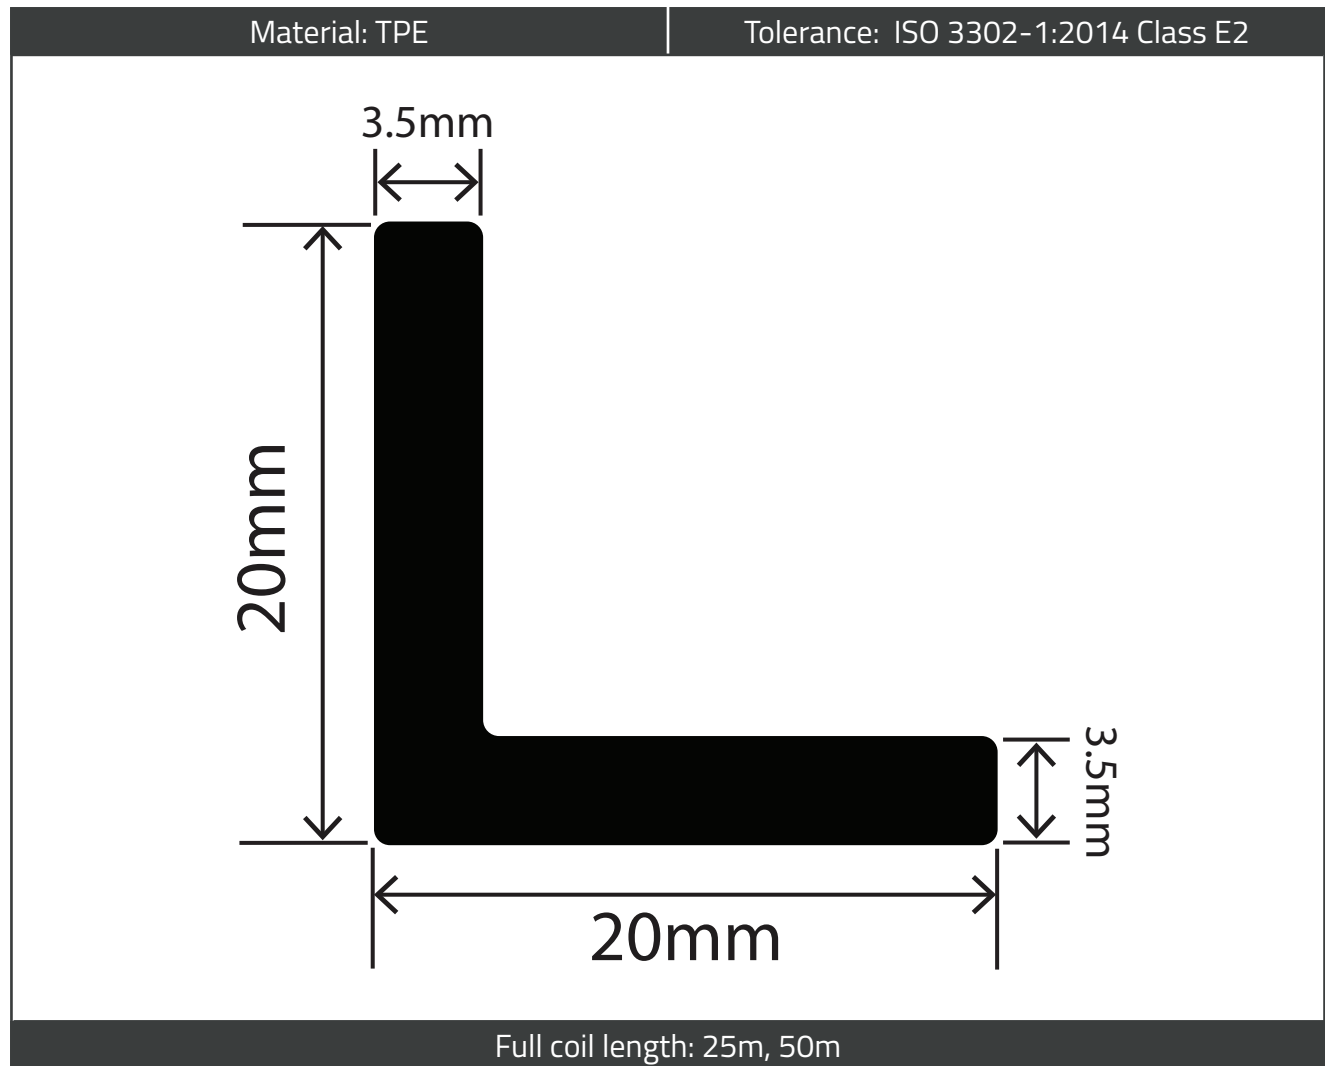

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk**W** www.rubbersmart.co.uk**T** +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80



The smart way to buy rubber & plastics

Technical Data

Property	Test Method	Value
Compound	-	Thermoplastic Elastomer (SEBS)
Colour	-	Black
Hardness (Shore A)	ASTM D2240	67°
Density	ASTM D792	1.2 kg/m3
Tensile Strength	ASTM D412	7 MPa
Elongation at Break	ASTM D412	750 %
Compression Set (22 h @ 23° C)	ASTM D395	15%
Compression Set (22 h @ 70° C)	ASTM D395	29 %
Compression Set (22 h @ 100° C)	ASTM D395	54 %
Reflexometric Fogging (3 h @ 100° C)	DIN 75201 A	96 %
Gravimetric Fogging (16 h @ 100° C)	DIN 75201 B	10.65 MG
Working Temperature Range	-	-40° C to +90° C

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk

W www.rubbersmart.co.uk

T +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80

