


EPDM L Profile - 50mm x 100mm

Product Code: RCAP50X100K

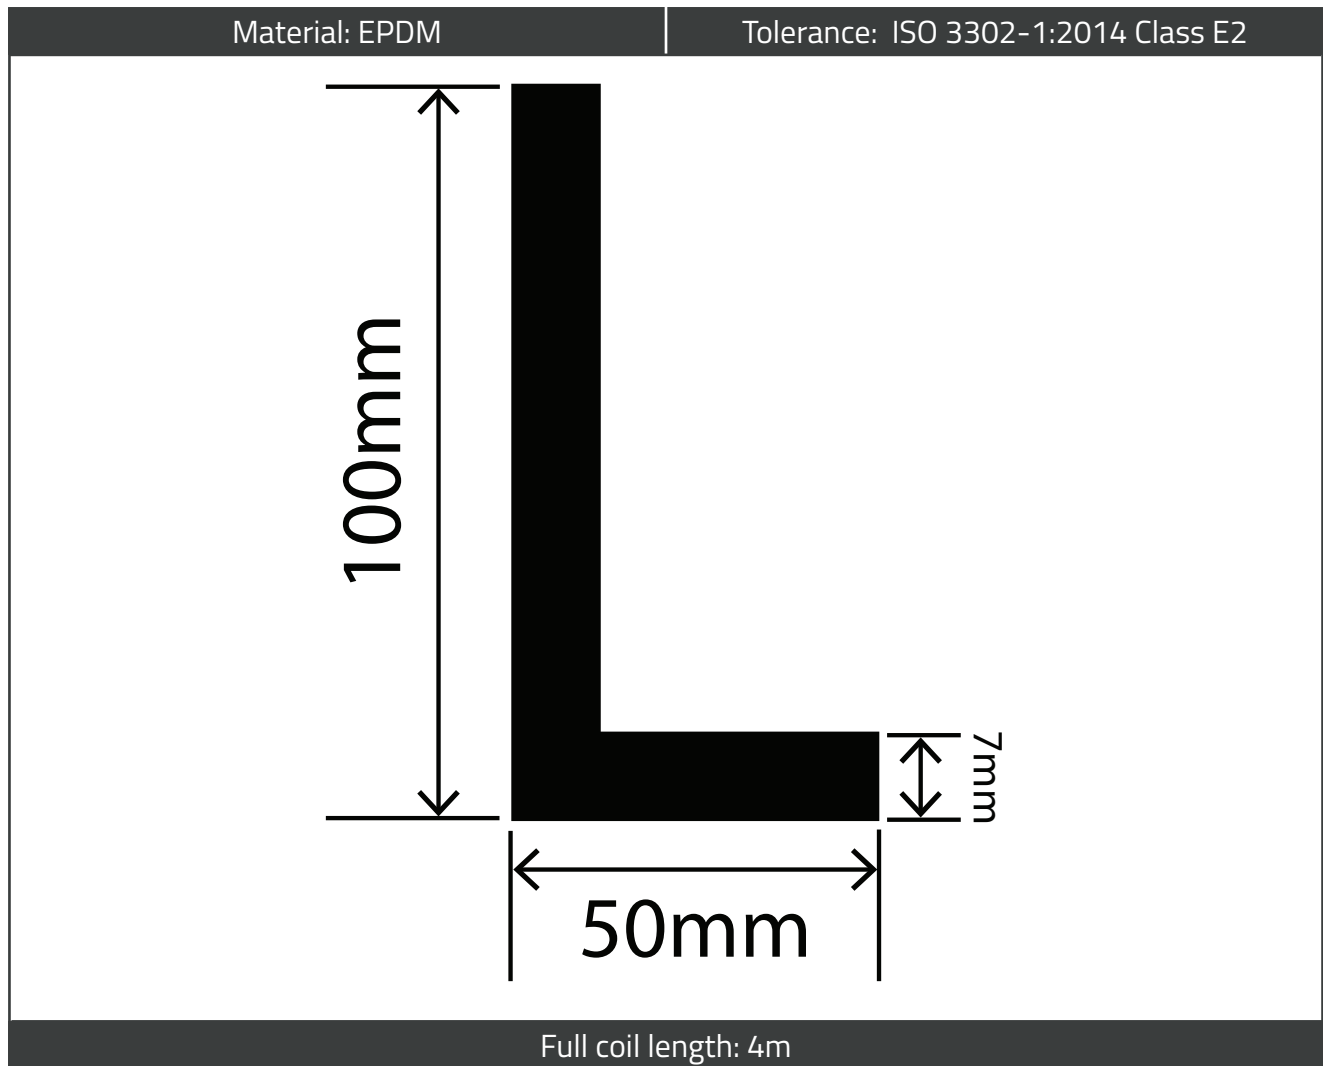

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk**W** www.rubbersmart.co.uk**T** +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80



The smart way to buy rubber & plastics

Technical Data

Property	Test Method	Value
Compound	-	Ethylene Propylene Diene Monomer
Colour	-	Black
Hardness (Shore A)	ISO 7619-1	70°
Tensile Strength	ISO 37	7.8 MPa
Elongation at Break	ISO 37	340 %
Tear Resistance	ISO 34-1	22.18 N/mm
Compression Set (22 h @ 100° C)	ISO 815	23.12 %
Low-Temperature Ageing Hardness Change (168 h @ -10° C)	DIN 53505	+4°
Ozone Resistance (72 hours at 40° C-50pphm)	ISO 1431-1 A	No Cracking (Pass)
UV Resistance	ASTM D 1148	No Change (Pass)
Brittleness Point (24 h @ -40° C)	ISO 812	No Cracking (Pass)
Working Temperature Range	-	-40° C to +120° C

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk

W www.rubbersmart.co.uk

T +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80

