
## **RUBBERSMART.co.uk**°

The smart way to buy rubber & plastics

## Neoprene U Channel Profile 4.5mm x 8.5mm

Product Code: RC-I0922

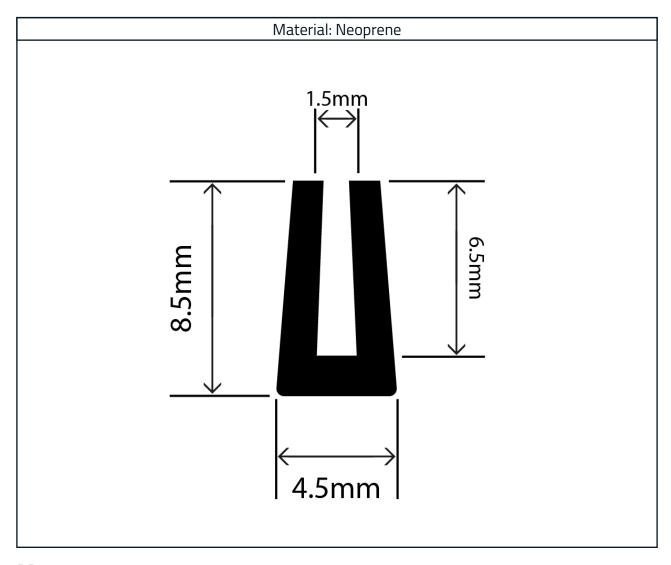

#### **Measurements:**

Height	Width	To Fit Panel
8.5mm	4.5mm	1.5mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

# RUBBERSMART.co.uk®

The smart way to buy rubber & plastics

### **Material Specification**

Properties	Values		
Polymer	CR		
Hardness (IRHD)	65° - 75° +/- 5		
Tensile Strength	5.00 MPa		
Elongation at Break	400%		
Tear Strength	17 kn/m		
Compression Set (22hrs @ 70°C)	70%		
Ozone Resistance (72hrs @ 40°C, 25pphm)	Some Cracks		
Heat Aging (70hrs @ 70°C)			
Change in Shore Hardness	+7°		
Change in Tensile Strength	+15%		
Change in Elongation at Break	-17%		
Working Temperature Range	-20°C to +90°C		



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.