


Hollow Rubber DD Fender - 50mm x 35mm

Product Code: RC0801-50

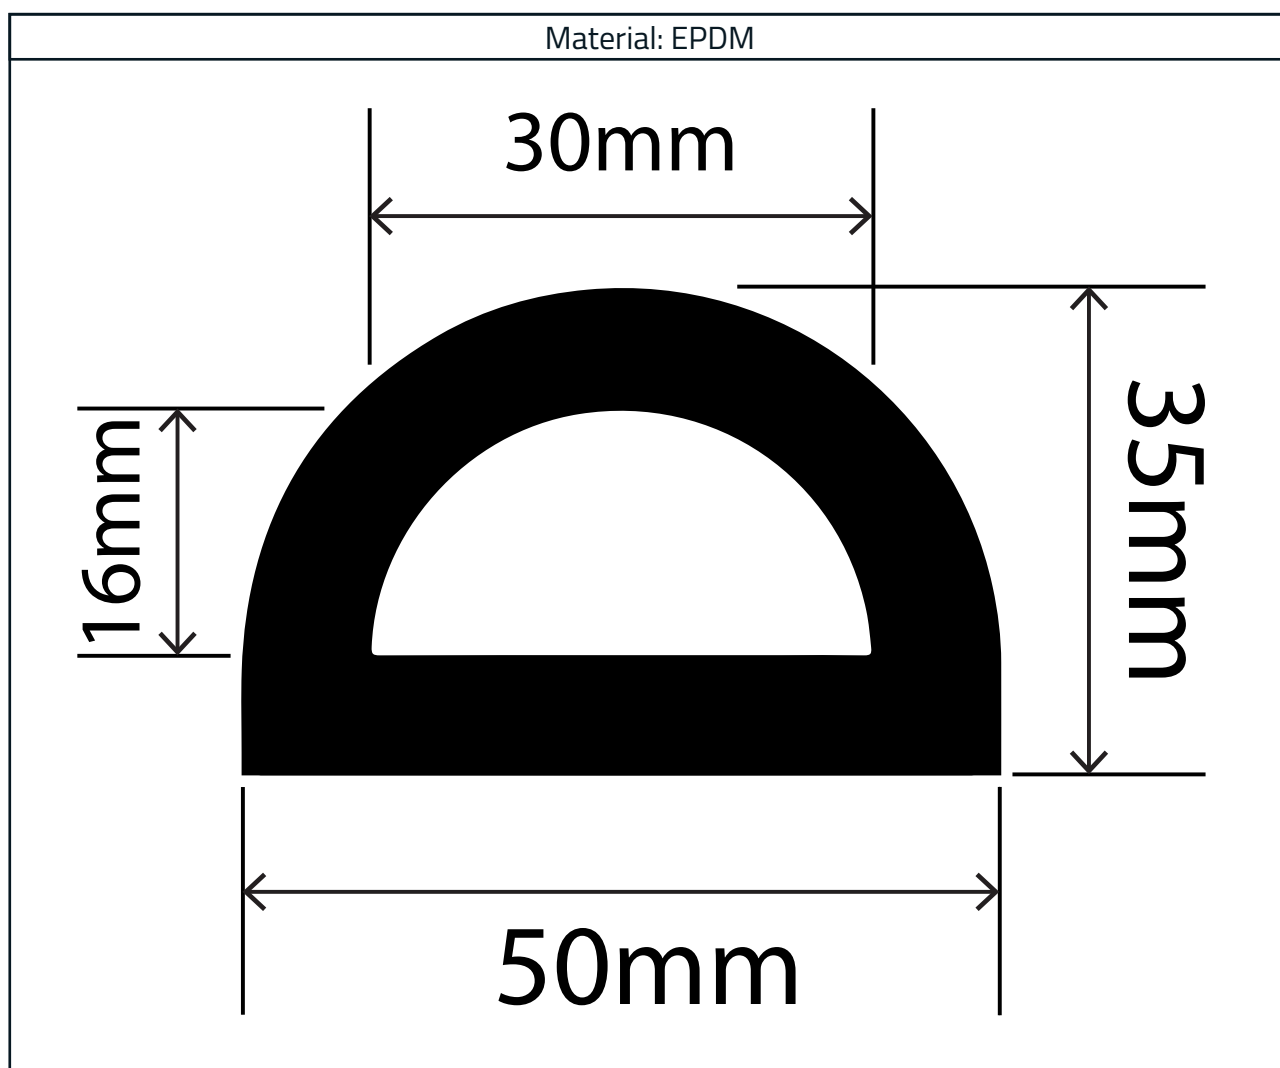

Measurements:

Height	Width
35mm	50mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Material Specification

Property	Test Method	Value
Compound	-	EPDM
Colour	-	Black
Hardness (Shore A)	ISO 7619-1	70-71°
Tensile Strength	ISO 37	7.8MPa
Elongation at Break	ISO 37	340%
Tear Resistance	ISO 34-1	22.18N/mm
Compression Set (22 hours at 100°C)	ISO 815	23.12%
Low-Temperature Ageing Hardness Change (168 hours at -10°C)	DIN 53505	+4°
Ozone Resistance (72 hours at 40°C -50pphm)	ISO 1431-1 A	NO CRACK
UV Resistance	ASTM D 1148	NO MIGRATION
Brittless Point (24hrs @-40°C)	ISO 812	NO CRACK
Working Temperature Range	-	-40°C TO +120°C



**ISO
9001 : 2015
REGISTERED**

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.