


Rubber TPE P Extrusion - 21mm x 6mm

Product Code: RC4308

Material: TPE

Ø4 x 6mm

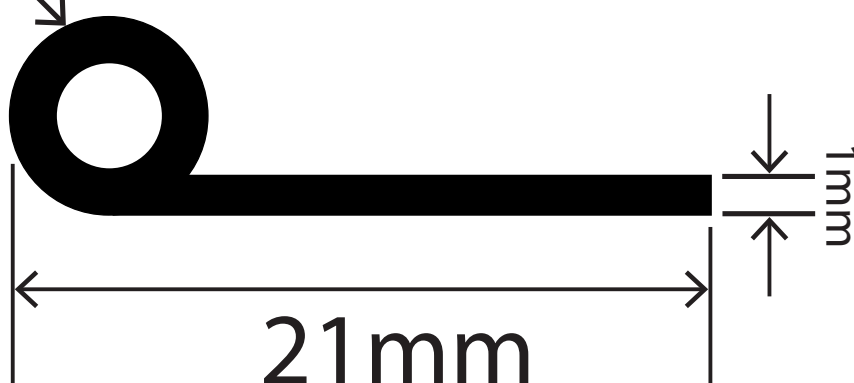

Measurements

Width	Height	Bead Inner Diameter
21mm	6mm	4mm

**ISO
9001 : 2015
REGISTERED**

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data

This profile is manufactured from a general-purpose thermoplastic elastomer rubber (TPE) of the S.E.B.S. type. It provides excellent resistance against outdoor ageing, as well as good resistance to acids and bases.

This compound is 100% recyclable.

Material Specification

Property	Test Method	Value
Polymer	-	Thermoplastic elastomer
Hardness	ISO 868	60° ±5°
Density	ISO 1183 1-A	1.10g/cm ³
Tensile Strength	ISO 37 / DIN 53504	7.70N/mm ²
Elongation at Break	ISO 37 / DIN 53504	700%
Compression Set (72h @ 23°C)	ASTM D395 89 B	21%
Compression Set (22h @ 70°C)	ASTM D395 89 B	41%
Operating Temperature Range	-	-65°C to +200°C



ISO
9001 : 2015
REGISTERED

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.