


EPDM L Profile - 38mm x 38mm

Product Code: RCAP38X38K

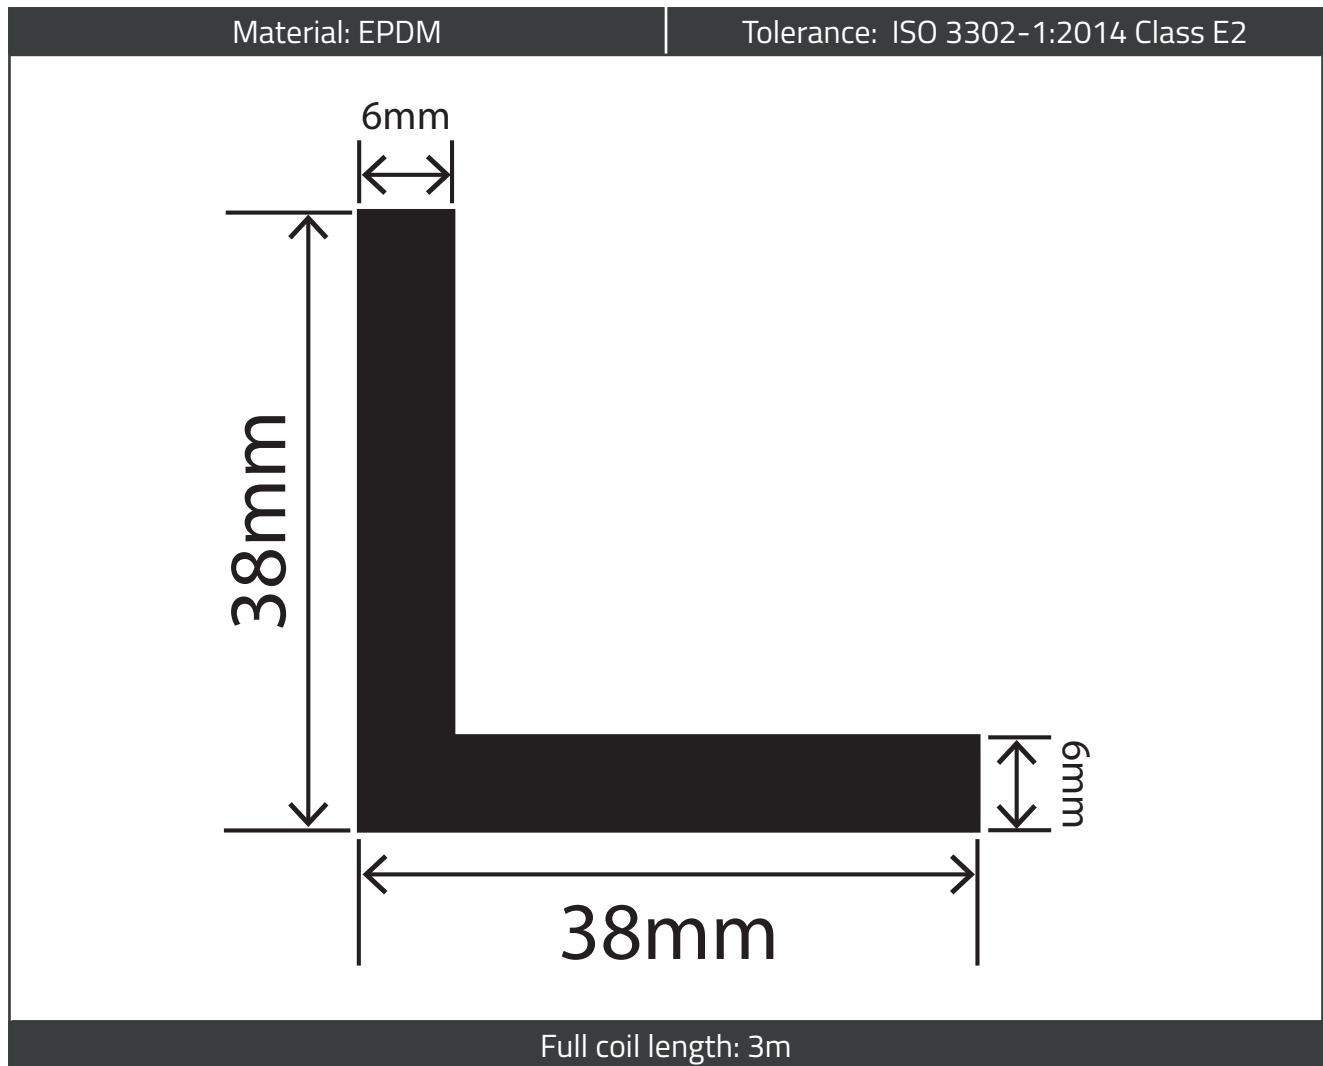

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk

W www.rubbersmart.co.uk

T +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80



The smart way to buy rubber & plastics

Technical Data

Properties	Values
Compound	Ethylene Propylene Diene Monomer
Colour	Black
Hardness (IRHD)	69° ± 5°
Tensile Strength	10.5 MPa
Elongation at Break	315 %
Tear Strength	12 kN/m
Compression Set (22 h @ 70° C)	7 %
Ozone Resistance (98 h @ 40° C, 100 pphm)	6
Cold Bend Test (-30° C)	No Cracking (Pass)
Migration Resistance	0.02 mg
Staining Resistance	No Staining (Pass)
UV Stability	No Cracking (Pass)
Heat Ageing (70 h @ 70° C)	
Shore Hardness Change	2°
Tensile Strength Change	5 %
Elongation at Break Change	0 %
Heat Ageing (10 days @ 70° C)	
Shore Hardness Change	2°
Tensile Strength Change	-1 %
Elongation at Break Change	7 %

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk**W** www.rubbersmart.co.uk**T** +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80

