


EPDM L Profile - 60mm x 60mm

Product Code: RCAP60X60L

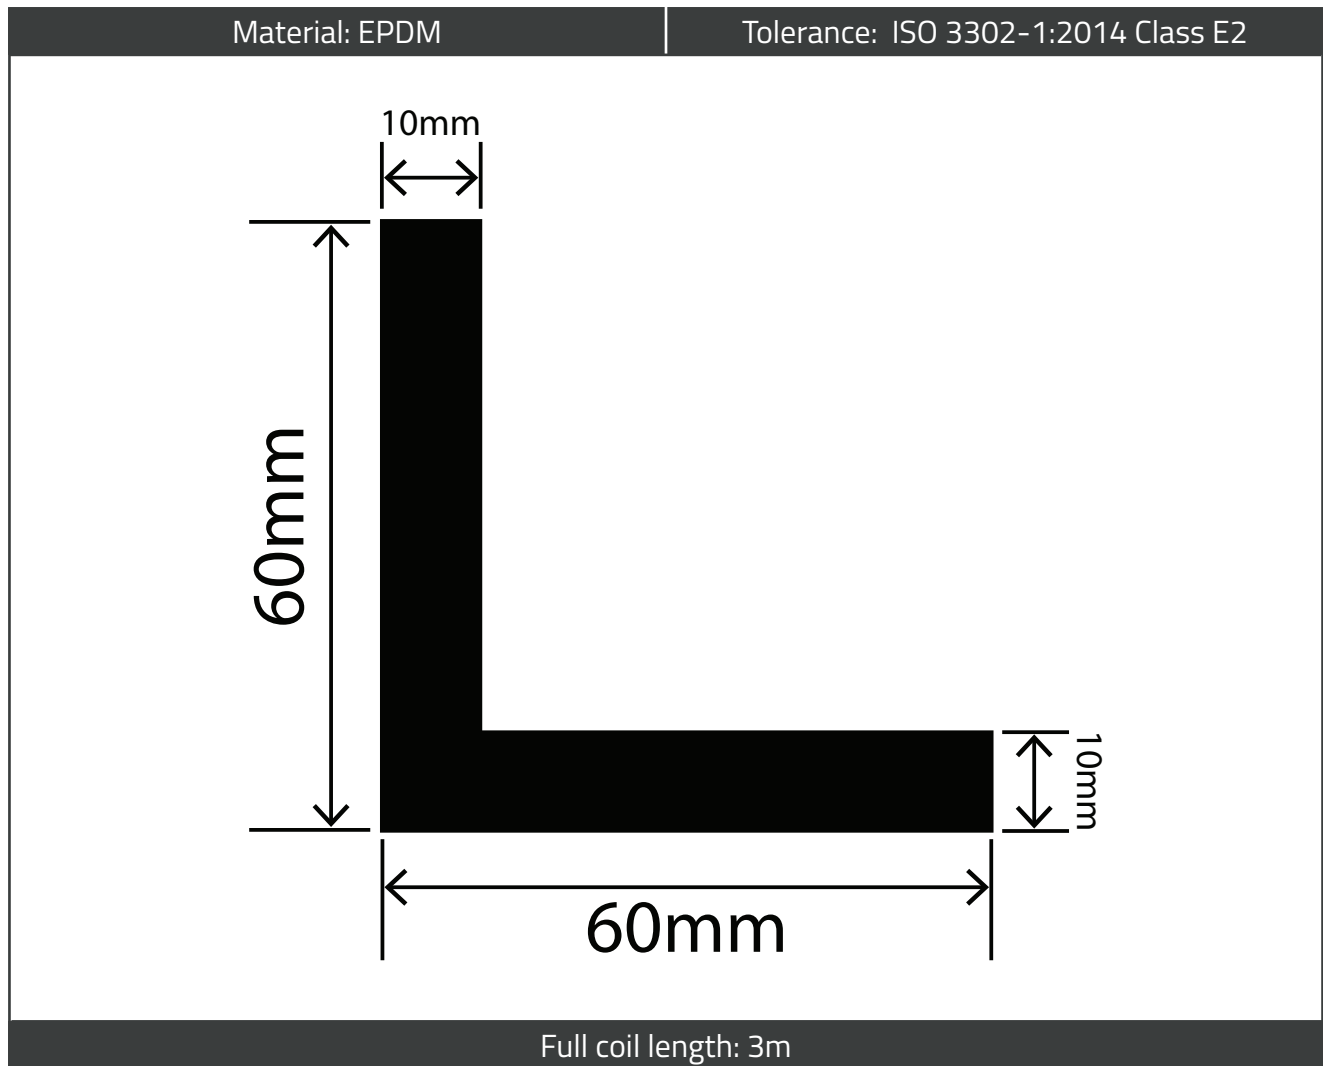

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk**W** www.rubbersmart.co.uk**T** +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80



The smart way to buy rubber & plastics

Technical Data

Property	Value
Compound	Ethylene Propylene Diene Monomer
Hardness (Shore A)	70°
Density	1.26 g/cm³
Tensile Strength	9 MPa
Elongation at Break	275 %
Compression Set (22 h @ 70° C)	22.5 %
Ozone and Weathering Resistance	Fair
Dilute Acids and Bases Resistance	Fair
Heat Resistance (70 h @ 70° C)	
Hardness Change	+5°
Tensile Strength Change	± 10 %
Elongation at Break Change	± 15 %

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. RubberSmart or The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E info@rubbersmart.co.uk

W www.rubbersmart.co.uk

T +44 (0) 1794 328 412

RubberSmart is a trading name of The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80

